

# Sirius - 24W

LLE1227-24W Linear Clean Area LED Luminaire



## Overview

A suspended or surface mounted linear LED luminaire specifically designed for Lowbay applications, plantrooms, switchrooms, food manufacturing, process plant areas, under platforms / services etc.

## Installation

The Luminaire is fixed to the ceiling using the clip-in brackets, making it quick and simple to install.



*Sirius*

### Electrical Data:

Voltage (V)	220-240
Frequency (Hz)	50
Power (W)	24
Power Factor	0.95
Total Power (W)	34

### Electrical Data:

Length (mm)	1200
Width (mm)	70
Height (mm)	70
Ope Dimension (mm)	N/A
Weight (kg)	4

### Lighting Data:

LED Type	Everlight
Luminous Flux	2880lm
CCT	4000K
CRI	>80
Efficacy	120lm/cw
Life Expectancy	>70,000hrs
Macadam Step	3

### Body / Diffuser:

Body Material	Aluminium
Body Finish	Anodised Aluminium
Body Colour	Anodised Aluminium
Diffuser	1.5 mm Polycarbonate
Cable Tail Lead	3m PVC/PVC

### Technical Data:

IP Rating	IP65
Max T (a)	35
Walk-on Loading	N/A
Temp Range	-25°C to + 40°C
Gland position	Side Entry


### Options:

Emergency	Yes, Integrated LED strip
-----------	---------------------------


[www.LEDspan.com](http://www.LEDspan.com) [info@LEDspan.com](mailto:info@LEDspan.com)

Ireland & International Tel: +353 (0) 56 440 0088, UK Tel: +44 (0) 161 464 8744

*The future of Controlled Environment Lighting just got brighter*

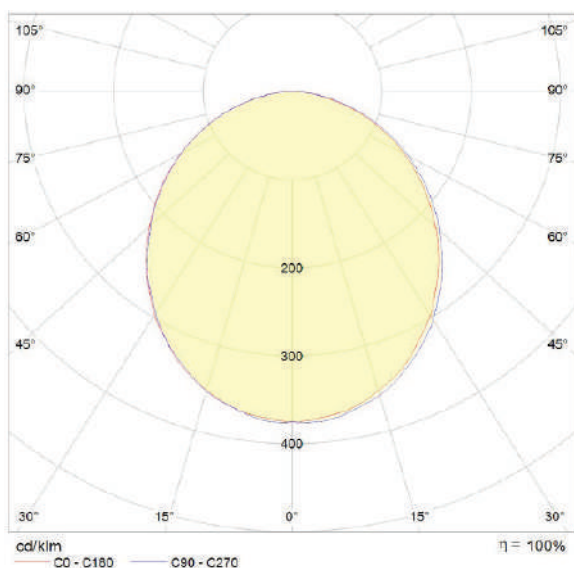

**Diagram**

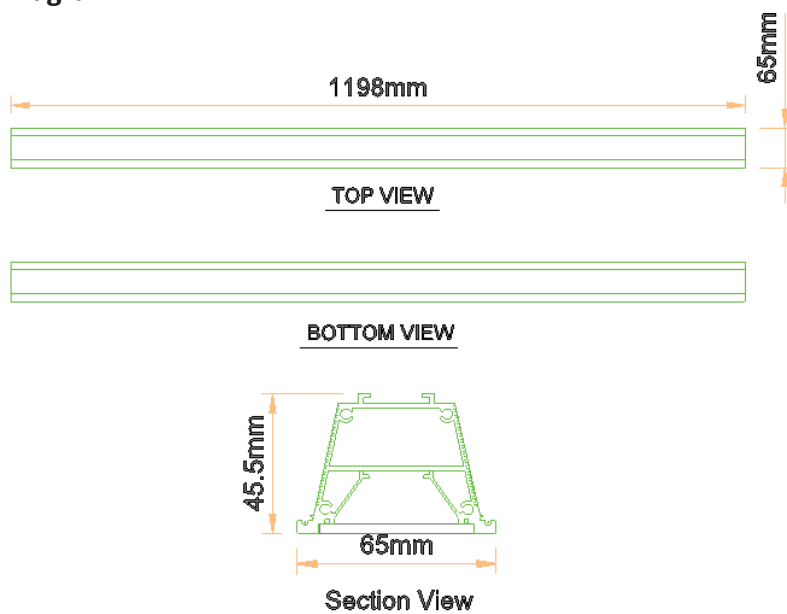

**Photograph**



**To Specify:**

Suspended or surface mounted, 1200mm 27W linear LED luminaire, aluminium body, polycarbonate diffuser.

**Bracket**

The fitting comes with an easy install snap in bracket that can be either fixed directly to a surface or suspended on a threaded rod.

**Example**

